

WOOD TABLES

22" DEEP

Standard "H" Frame Table



Width	Without Drawers			With Drawers	
	Standing Hgt.	Sitting Hgt.	# Drws	Standing Hgt.	Sitting Hgt.
24"	TAC1124W	TAC2124W	1	TAA1124W	TAA2124W
30"	TAC1130W	TAC2130W	1	TAA1130W	TAA2130W
36"	TAC1136W	TAC2136W	1	TAA1136W	TAA2136W
42"	TAC1142W	TAC2142W	1	TAA1142W	TAA2142W
48"	TAC1148W	TAC2148W	2	TAB1148W	TAB2148W
60"	TAC1160W	TAC2160W	2	TAB1160W	TAB2160W
72"	TAC1172W	TAC2172W	2	TAB1172W	TAB2172W
1000mm	TAC110BW	TAC210BW	1	TAA110BW	TAA210BW
1500mm	TAC110CW	TAC210CW	2	TAB110CW	TAB210CW

- When ordering a table with drawers to match Architectural Overlay design use option code "OLP" to add flush overlay panel.

Six Leg Combination Table



Width	Without Drawers			With Drawers	
	Standing Hgt.	Sitting Hgt.	# Drws	Standing Hgt.	Sitting Hgt.
72"	TCC1172W	TCC2172W	2	TCB1172W	TCB2172W
84"	TCC1184W	TCC2184W	2	TCB1184W	TCB2184W
96"	TCC1196W	TCC2196W	4	TCB1196W	TCB2196W
2000mm	TCC110DW	TCC210DW	2	TCB110DW	TCB210DW

- When ordering a table with drawers to match Architectural Overlay design use option code "OLP" to add flush overlay panel.

WOOD TABLES

28" DEEP

Standard "H" Frame Table



Width	Without Drawers			With Drawers	
	Standing Hgt.	Sitting Hgt.	# Drws	Standing Hgt.	Sitting Hgt.
24"	TAC1224W	TAC2224W	1	TAA1224W	TAA2224W
30"	TAC1230W	TAC2230W	1	TAA1230W	TAA2230W
36"	TAC1236W	TAC2236W	1	TAA1236W	TAA2236W
42"	TAC1242W	TAC2242W	1	TAA1242W	TAA2242W
48"	TAC1248W	TAC2248W	2	TAB1248W	TAB2248W
60"	TAC1260W	TAC2260W	2	TAB1260W	TAB2260W
72"	TAC1272W	TAC2272W	2	TAB1272W	TAB2272W
1000mm	TAC120BW	TAC220BW	1	TAA120BW	TAA220BW
1500mm	TAC120CW	TAC220CW	2	TAB120CW	TAB220CW

- When ordering a table with drawers to match Architectural Overlay design use option code "OLP" to add flush overlay panel.

Six Leg Combination Table



Width	Without Drawers			With Drawers	
	Standing Hgt.	Sitting Hgt.	# Drws	Standing Hgt.	Sitting Hgt.
72"	TCC1272W	TCC2272W	2	TCB1272W	TCB2272W
84"	TCC1284W	TCC2284W	2	TCB1284W	TCB2284W
96"	TCC1296W	TCC2296W	4	TCE1296W	TCE2296W
2000mm	TCC120DW	TCC220DW	2	TCE120DW	TCE220DW

- When ordering a table with drawers to match Architectural Overlay design use option code "OLP" to add flush overlay panel.

WOOD TABLES
Hybrid Wood Table With Welded Steel Frame


Width	22" Deep	28" Deep
48"	TAH2148	TAH2248
60"	TAH2160	TAH2260
72"	TAH2172	TAH2272

- Heavy-duty steel apron is clad with your choice of veneer and is designed to support 1000 lbs.
- 2-1/2" x 2-1/2" wood legs with telescoping stainless steel inserts that are height-adjustable from 28-3/4" to 38-3/4" high. Legs are pin adjustable in 1" increments.
- The table has 7" modesty rails on three sides with a 2" front rail.
- Ships partially assembled.


STEEL TABLES
Vibration Isolation Table


Width	22" Deep		28" Deep	
	Standing Hgt.	Sitting Hgt.	Standing Hgt.	Sitting Hgt.
36"	VIT1136	VIT2136	VIT1236	VIT2236
42"	VIT1142	VIT2142	VIT1242	VIT2242
48"	VIT1148	VIT2148	VIT1248	VIT2248

The Vibration Isolation Table is designed to provide stable working conditions for devices that are sensitive to vibration and shocks. Table consists of an outer table frame that supports the main work surface which is not isolated from vibration and an inner table frame that is entirely separate and supports the inner isolated work surface. This ensures vibrations are not transmitted to the isolated inner work surface.

- Outer Table Frame consists of two 18 gauge hollow vertical pedestals. Each pedestal has removable inner panels for access the anchor bolts and levelers. Pedestals are connected with 16 gauge steel rails. A flange is provided around the perimeter of the pedestals for mounting of the non-isolated work surface.
- Inner Table Frame consists of a rectangular hollow steel welded frame with each leg supplied with levelers and provisions for anchoring. Legs are joined by 11 gauge steel angles which support the isolated platform.
- Isolated Platform consists of a formed 18 gauge steel tray that is to be filled with ballast (such as sand or concrete - not included). The platform is supported by four rubber shock absorbing isolators. A flange is provided around the perimeter of the tray for mounting the isolated work surface.
- Available in either type 304 stainless steel or powder coated steel.
- Work surface not included.
- Ships assembled.

Typical Non-Isolated 1" Thick Work Surface
For 22" & 28" Deep Tables

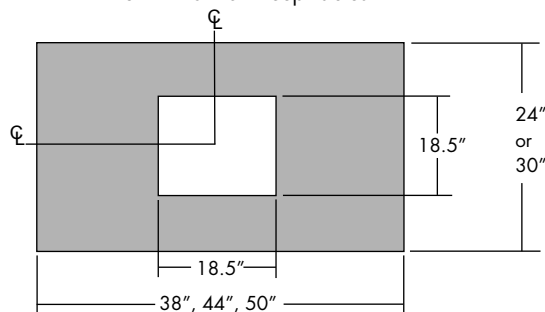

- Work surface shown with 1" overhang on all sides for freestanding installations.
- When in an elevation of casework, adjust overhang as needed.

Typical Inner Isolated 1" Thick Work Surface
For 22" & 28" Deep Tables

